
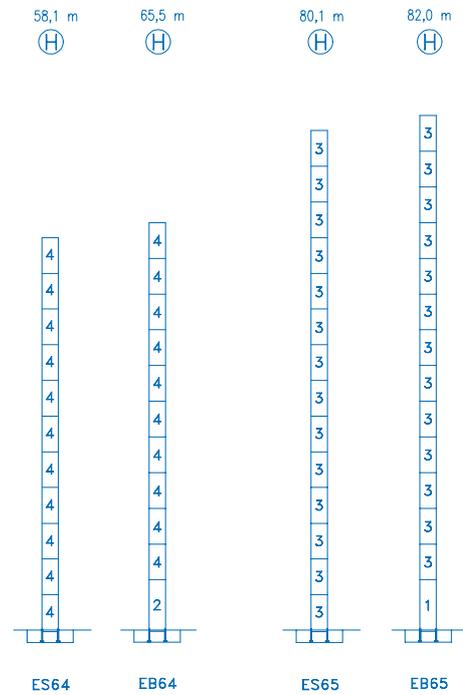


CE  
DIN 15018 H1 B3

R	R(Cmax)	Cmax	30	35	40	45	50	55	60	64	70	74	80
80	28,6 m	24000	22740	19050	16320	14220	12550	11190	10070	9300	8310	7740	7000
74	28,8 m	24000	22880	19170	16430	14310	12630	11270	10140	9360	8370	7800	
70	30,4 m	24000	24000	20460	17550	15300	13520	12080	10870	10050	9000		
64	30,5 m	24000	24000	20550	17620	15370	13580	12130	10920	10100			
60	33,0 m	24000	24000	22420	19260	16820	14880	13310	12000				
50	36,9 m	24000	24000	24000	21930	19180	17000						
40	37,0 m	24000	24000	24000	22000								

(1) Cmax ≤ 60 t (Consultar / To consult / A consulter / Konsultieren)

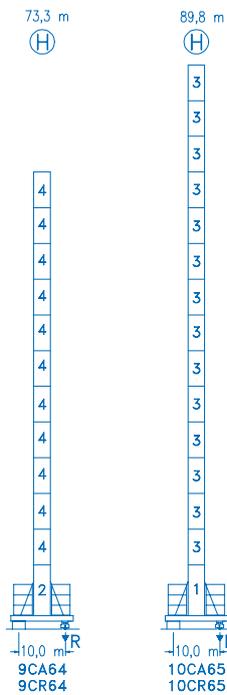

N	Ref.	□	h
1	BD54	4,0	7,4 m
2	BD44	3,2	7,4 m
3	D54	4,0	5,5 m
4	D44	3,2	5,5 m

<b>R. máx.</b>	En servicio In operation En service In Betrieb	<b>9CR64</b> ..... 149,4 t
		<b>10CR65</b> ..... 185,6 t



<b>R. máx.</b>	Fuera de servicio Out of service Hors service Ausser Betrieb	<b>9CR64</b> ..... 154,2 t
		<b>10CR65</b> ..... 273,1 t

**CFU-11**  
11 kW  
0 ↻ 94 m/min

**GR-12**  
4 x 120 Nm  
0 ↻ 0,6 rpm

**TRA-10**  
2 x 100 Nm  
0 ↻ 20 m/min

**TRA-10VC**  
2 x 100 Nm  
0 ↻ 20 m/min

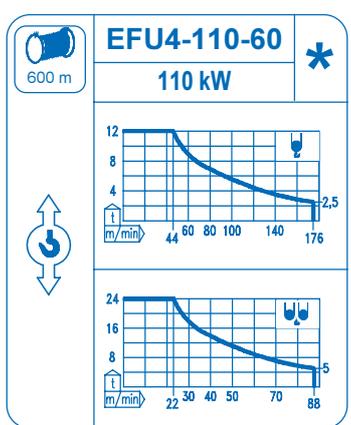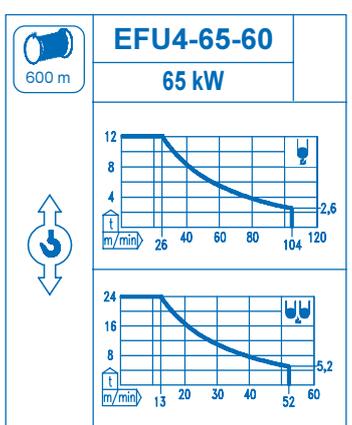

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	<b>400 V</b> <b>3 ph</b> <b>50 Hz</b>
--	---

Opcional Optional En option Kaufoption	<b>*</b>
---	----------