


LC 2100


21 LC 290


18 t

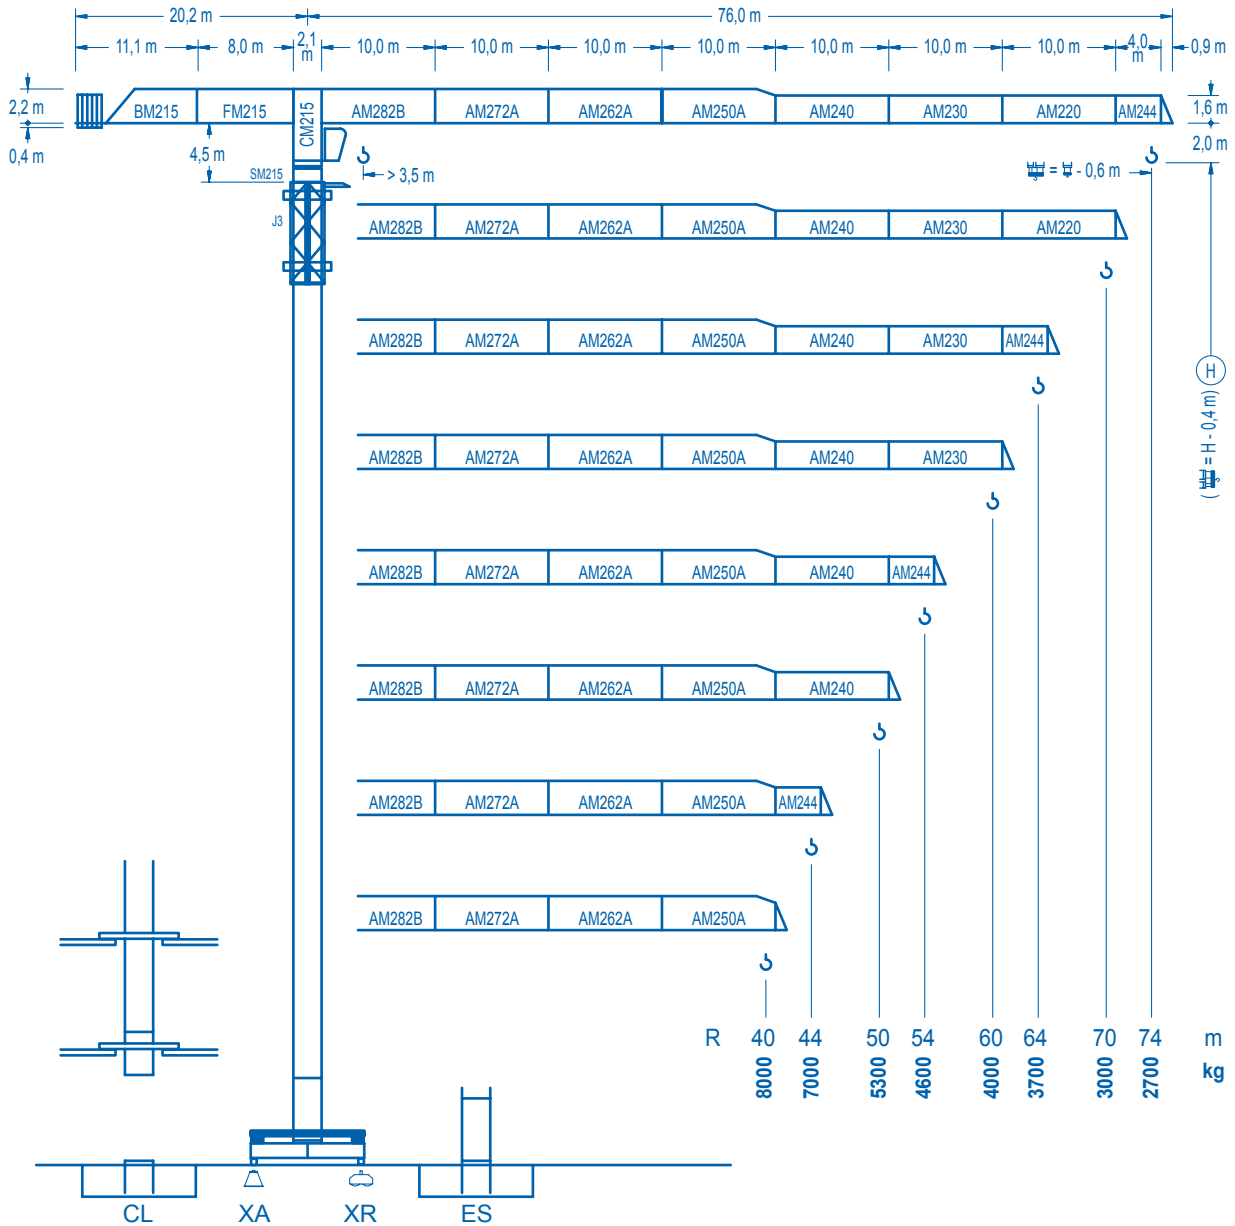


CE EN 14439 (C/25)

R (m)																															
	14.3	15	20	25.8	25.9	30	34	40	44	50	54	60	64	70	74	m	14.6	15	20	26.4	26.7	30	34	40	44	50	54	60	64	70	m
74	18000	17005	12165	9000	9000	7660	6660	5545	4980	4300	3930	3475	3220	2890	2700	kg	18000	17460	12500	9000	9000	7920	6890	5745	5155	4455	4075	3605	3340	3000	kg
70																	18000	17460	12500	9000	9000	7920	6890	5745	5155	4455	4075	3605	3340	3000	kg
64																	18000	13585	10470	9000	9000	7580	6325	5685	4920	4505	3990	3700	kg		
60																	18000	13480	10390	9000	9000	7585	6335	5695	4930	4515	4000	kg			
54																	18000	13610	10500	9000	9000	7725	6450	5800	5020	4600	kg				
50																	18000	14255	11005	9000	9000	8140	6800	6115	5300	kg					
44																	18000	16115	12480	10100	9000	9000	7775	7000	kg						
40																	18000	16490	12275	10345	9000	9000	8000	kg							

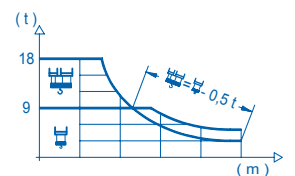

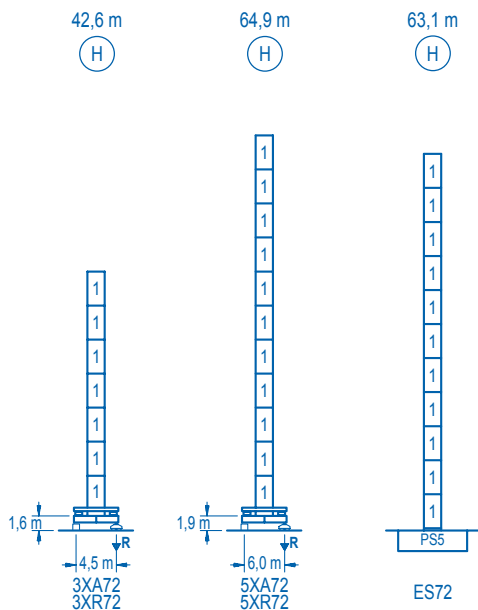

n°	Ref.	h	h (m)
1	S25	2,0	5,5
2	TD23A	2,0	5,5
3	CLD23A	2,0	3,1

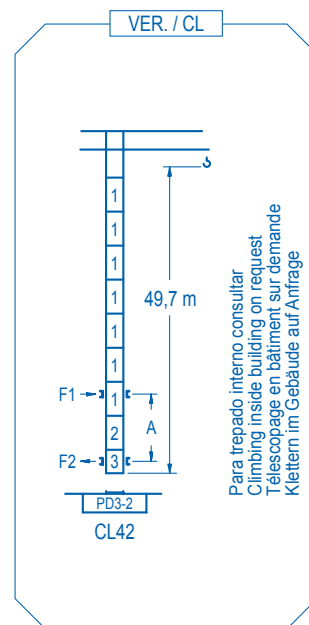

Para trepado interno consultar
 Climbing inside building on request
 Télecage en bâtiment sur demande
 Klettern im Gebäude auf Anfrage

R. máx.	En servicio In operation En service In Betrieb	3XR72..... 105,0 t	R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	3XR72..... 73,8 t
		5XR72..... 107,2 t			5XR72..... 132,0 t

Para otras zonas de viento o alturas superiores consultar
 For other wind zones or additional hook heights on request
 Pour d'autres zones de vent ou des hauteurs supplémentaires sur demande
 Für andere Windzonen oder weiteren Hakenhöhen auf Anfrage

	3XA72	5XA72	ES72
A max	29,1	51,4	49,6
B max	-	33,0	-
C max	52,0	46,5	46,5
H max	81,1	108,6	97,9
			130,9
			96,1
			129,1

CFU-7.5
7,5 kW

0 ⇄ 94 m/min

GR-12
3 x 120 Nm

0 ⇄ 0,7 rpm

TRA-7.5
2 x 75 Nm

0 ⇄ 20 m/min

TRA-7.5VC *

2 x 75 Nm

0 ⇄ 20 m/min

5XR72

EFU5-50-45
50 kW

EFU6-65-45 *

65 kW

EFU4-110-45 *

110 kW

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	------------------------

Opcional Optional En option Kaufoption	*
---	---



Tel.: (34) 948 335 020
 Fax: (34) 948 330 810
 e-mail: info@comansa.com
 www.comansa.com

Polígono Urbizkain
 E-31620 HUARTE-PAMPLONA.- SPAIN